

RFD-8696

RFID Transducer


DESCRIPTION

The RFD-8696 is a transducer for short range reading and writing of RFID tags including GEN2 tags.

Applications include printers, automation equipment, as well as others.

The transducer is ROHS Compliant.

Contact us if you have questions about the RFD-8689's suitability for your application.

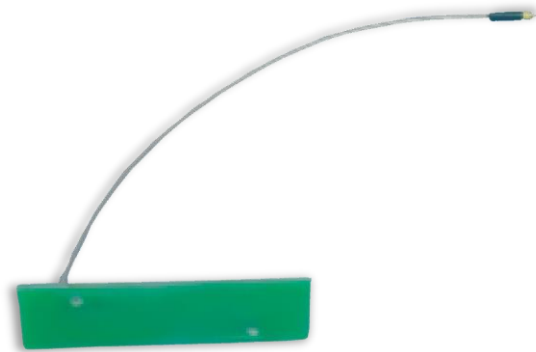

RFID Transducer

SPECIFICATIONS

ELECTRICAL

Frequency Band	860 MHz to 960 MHz
VSWR	< 2.0 : 1
Polarization	Linear
Power	1 Watts CW
Connector	12.5" (31.75 cm) Pendant Cable

MECHANICAL

Weight	3 oz (85 g)
PCB Dimensions	4" L x 1" W (10.16 cm L x 2.54 cm W)
Cable Length	13" (33.02 cm)
Finish (Default)	Solder Mask